

Quick Start

IdeaShare Key ○○○○○○○○○○




Issue: 09

Date: 2023-03-30

1 Appearance

IdeaShare Key is used with endpoints to share materials.

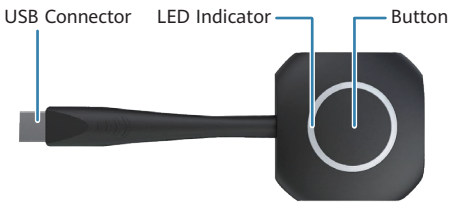

- **USB Connector**
Used to connect IdeaShare Key to an endpoint or PC.
- **Button**
Used to start or stop video/audio sharing from the PC to the endpoint.
- **LED Indicator**

Indicator	IdeaShare Key Status
Off	Not inserted in any PC or endpoint.
Blinking blue at low brightness (once per second)	<ul style="list-style-type: none">• Inserted in an endpoint and is pairing or upgrading.• Inserted in a PC and is connecting to an endpoint.
Steady blue at low brightness	<ul style="list-style-type: none">• Inserted in an endpoint and is paired or upgraded.• Inserted in a PC and connected to an endpoint.• Screen sharing is stopped.
Steady blue at high brightness	The screen is being shared.

Indicator	IdeaShare Key Status
Blinking blue at low brightness (four times per second)	Faulty

2 Pairing

Insert IdeaShare Key in an endpoint. Wait until a message is displayed indicating that IdeaShare Key is successfully paired on the endpoint's user interface.

The product models compatible with the IdeaShare Key are as follows:

IdeaHub series

Collaboration Device series

CloudLink series

The following product models only in 21.0.300.9 and later versions can be used with the IdeaShare Key for projection on the macOS:

IdeaHub Enterprise, IdeaHub Pro, IdeaHub S, IdeaHub Board Pro, Collaboration Device Pro, Collaboration Device, Collaboration Device Lite

3 Installation

Install the IdeaShare Key software on the PC for the first time.

- 1 Remove the paired IdeaShare Key from endpoint and connect it to the USB port of the PC.
- 2 Double-click **IdeaShare Key.exe** to install the software.

The installation file path varies depending to

the operating system version. For example, if the operating system is Windows 10 Professional, the installation file path is **This PC > IdeaShare Key > IdeaShare Key.exe**.

4 Operation

To share the screen using IdeaShare Key, perform the following steps:


- ➊ Insert IdeaShare Key in the USB port of the PC. Wait until a message is displayed, indicating that the connection is successful and the LED indicator turns blue at low brightness.
- ➋ Press the button on IdeaShare Key to share the PC screen and audio to the endpoint. Then you can watch the PC screen on the endpoint.

Press the button again to stop sharing.

5 Specifications

Item	Specification
Power supply	5 V DC
Maximum power consumption	2.5 W
Ambient temperature	<ul style="list-style-type: none">• Operating state: 0°C to 40°C (32°F to 104°F)• Non-operating state: -40°C to +70°C (-40°F to +158°F)
Relative humidity (non-condensing)	<ul style="list-style-type: none">• Operating state: 5% to 95%• Non-operating state: 0% to 95%

Item	Specification
Package dimensions (H x W x D)	213 mm × 100 mm × 28 mm
Product dimensions (H x W x D)	177.3 mm × 65 mm × 19.8 mm
Gross weight	196 g
Net weight	80 g
Wi-Fi frequency	2.4 GHz and 5 GHz
Wi-Fi operating frequency bands	<ul style="list-style-type: none"> • 2400 MHz to 2483.5 MHz • 5150 MHz to 5250 MHz • 5725 MHz to 5850 MHz
Maximum Wi-Fi power	20 dBm
Actual Wi-Fi power	<ul style="list-style-type: none"> • 2.4 GHz: 15.75 dBm • 5 GHz: 15.83 dBm
Projection resolutions	<ul style="list-style-type: none"> • Windows: up to 4K 30 fps • macOS: up to 2K 30 fps
OS	<ul style="list-style-type: none"> • 32-bit or 64-bit Windows 7, 8, 8.1, 10, or 11 • macOS 10.13.6 or later

 Note: The preceding specifications are obtained from lab tests. The actual specifications may vary depending on the environment and devices.

Statement on a Class A Product

Warning: Operation of this equipment in a residential environment could cause radio interference.

Angaben zu einem Produkt der Klasse A

Warnhinweis: Der Betrieb dieses Geräts bzw. dieser Einrichtung kann im Wohnbereich Funkstörungen verursachen.

Hereby, EShare Technology Co., Ltd. declares that the radio equipment type is in compliance with Directive 2014/53/EU. The full text of the EU declaration of conformity is available at the following internet address: <http://www.ee-share.com/en/product-certification>.

Manufacturer@EShare Technology Co., Ltd.

13A25, Hongfa Center Building


Bao'an, Shenzhen 518100

People's Republic of China

Powered by HUAWEI IdeaShare

Disposal and Recycling Information



This symbol on the device and any included batteries indicates that they should not be disposed of as normal household garbage. Do not  dispose of your device or batteries as unsorted municipal waste. They should be handed over to a certified collection point for recycling or proper disposal when they can no longer be used.

For more detailed information about the recycling of the device or batteries, contact your local city office, the household waste disposal service, or the retail store where you purchased this device.

The disposal of this device is subject to the Waste from Electrical and Electronic Equipment (WEEE) Directive of the European Union. The purpose for separating WEEE and batteries from other waste is to minimize any environmental impact and health hazards due to the presence of hazardous substances.

Reduction of Hazardous Substances

This device is compliant with the EU Registration, Evaluation, Authorization and Restriction of Chemicals (REACH) Regulation (Regulation No 1907/2006/EC of the European Parliament and of the Council) and the EU Restriction of Hazardous Substances (RoHS) Directive (Directive 2011/65/EU of the European Parliament and of the Council).

Warranty Card

Thank you for choosing our products. Please read this warranty card carefully and fill in the required information. Keep the card in a safe place. If lost it cannot be replaced.

Registry

Your Name (or Company Name): _____

Contact		Invoice Number	
Address		Expiration Date	
Telephone		Dealer's Name	
Product Model		Dealer's Address	
Serial Number		Dealer's Telephone	

Dealer's Seal: _____

Limited Warranty

We warrant the products that are purchased from authorized dealers to be free from defects in materials and workmanship, under proper use and in normal conditions, during the expressed warranty period.

Special Notice

1. The terms of warranty expressed in the purchase contract enjoy higher validity than the terms expressed within this card. This card is intended to be used solely as a warranty certificate.
2. The warranty card must be preserved in good condition and free of any scratch or alterations.
3. The warranty card must be presented to the authorized service technician when the product is being returned for repairs.

This warranty card does not cover defects caused by:

1. Modifications and alterations performed on the warranted product by parties other than authorized dealers.
2. Damage caused by using the product under inadequate operating environments.
3. Force majeure including but not limited to fires, earthquakes, lightning storms, and tsunami.
4. Operations performed on the product unexpressed within User Guide.
5. Normal wear and tear of components, including but not limited to the shell and the power module.
6. The warranty card is altered or rendered illegible, or the product serial number recorded on the warranty card is inconsistent with the serial number imprinted or labeled on the product.

For cases not included within this limited warranty, not applicable, or where the warranty is rendered void or expired, we reserve the right to charge for the repair services should the said products be capable of being repaired.

We reserve the right to interpret this limited warranty.

Contact Information

Huawei Technologies Co., Ltd.
Huawei Industrial Base
Bantian, Longgang
Shenzhen 518129
People's Republic of China